



## Mathematical Modelling of Subsurface Seepage Flow in 2-Dimensional Anisotropic Porous Medium

---

Chhaya Lande and Shikha Saxena

EasyChair preprints are intended for rapid dissemination of research results and are integrated with the rest of EasyChair.

May 2, 2020

# Mathematical Modeling of Subsurface Seepage Flow in 2-Dimensional Anisotropic Porous Medium

Dr. Chhaya K Lande<sup>1</sup> Shikha saxena<sup>2</sup>

<sup>1</sup>RMD Sinhgad School of Engineering, Warje, Pune, India.

[chhayakl@rediffmail.com](mailto:chhayakl@rediffmail.com)

<sup>2</sup>RMD Sinhgad School of Engineering, Warje, Pune, India.

[ss.shikha.06@gmail.com](mailto:ss.shikha.06@gmail.com)

## Abstract

Prediction of water table fluctuation using mathematical models is an emerging technology. An analytical solution to predict the dynamic behavior of water table fluctuation in an anisotropic unconfined aquifer is presented in this paper. The aquifer overlying on leaky base is subjected to artificial recharge from top and withdrawal from wells. In 2-Dimensional aquifer number of basins and well is been considered. Two cases based on different hydrological systems is been analyzed. In the first case aquifer considered is having two side no-flow conditions and in the second case aquifer is isolated, having all four boundaries impervious. The seepage flow is approximated by non-linear partial differential equation called Boussinesq equation and is solved by finite Fourier transforms. The application of closed-form solution is demonstrated using an illustrative example. Effect of aquifer parameters on the formation of groundwater mound and cone of depression due to recharge and withdrawal are discussed. Effect of permeability of aquifer base is also observed.

**Key words:** Leaky base , Boussinesq Equation, Recharges, Withdrawal , Fourier Transform

## INTRODUCTION:

In this new era mathematical models are the technique that can predict the transient as well as steady-state behavior of water table in unconfined aquifers under seepage and recharge conditions. These modeling techniques for simulation of subsurface seepage flow in confined as well as unconfined aquifers have been presented by several investigators like [20], [11],[18], [19], [26], [22], [1],[2],[3],[4],[5]. Some fundamental works concerning water table fluctuations in a rectangular-shaped homogeneous aquifer system due to localized recharge and withdrawal include [10], [99],[14],[15],[9], [17].

In this paper, a new analytical solution of a 2-dimensional linearized Boussinesq equation is developed. The hydrological setting of the model consists of an unconfined anisotropic aquifer overlaying a semi-pervious (leaky) base, subjected to recharge and withdrawal activities through multiple recharge basins and extraction/injection wells. This paper consists of a study of two hydrological systems. One is by considering two sides no flow condition and in the second case aquifer is isolated, having all four boundaries are impervious. The 2-dimensional linearized Boussinesq equation is solved using a finite Fourier transform. The closed-form solution is obtained. The sensitivity of the hydraulic head based on variation in aquifer parameters is analyzed. The result obtained in both cases is discussed and compared.

## DEVELOPMENT OF MATHEMATICAL MODEL

The model consists of an anisotropic unconfined aquifer of dimension  $A \times B$  is underlain by a semi-pervious (leaky) base. Typically, such leaky semi-porous formations connect the unconfined aquifer with adjacent confined aquifers. Hydraulic conductivities of the aquifer along  $x$  and  $y$  directions are  $K_x$  and  $K_y$  respectively. The aquifer is in contact with two water bodies along with the coastlines  $x = 0$  and  $x = A$ , maintaining a constant water head  $h_0$  along these coastlines. The other two boundaries, namely  $y = 0$  and  $y = B$  of the aquifer are fully impervious similarly in the second case all four side impervious boundaries are considered. The initial depth is uniform  $h_0$ . Recharge and withdrawal activities are carried out using rectangular basins and point sized extraction wells located in the domain of the aquifer. If  $h(x, y, t)$  denotes the variable water table measured from horizontal datum, then the groundwater flow in unconfined horizontal aquifer with semi-pervious base is governed by the following 2-dimensional partial differential equation:

$$K_x \frac{\partial}{\partial x} \left( h \frac{\partial h}{\partial x} \right) + K_y \frac{\partial}{\partial y} \left( h \frac{\partial h}{\partial y} \right) + P(x, y, t) = S \frac{\partial h}{\partial t} + \frac{k}{b} (h - h_0) \quad (1)$$

where  $S$  = specific yield;  $k$  and  $b$  are the hydraulic conductivity and thickness of the base. The term  $P(x, y, t)$  signifies the combined effects of recharge and withdrawal. The number of basins and wells are considered to be  $n_1$  and  $n_2$  respectively. The  $i^{\text{th}}$  basin is centered at  $(x_i, y_i)$  and is of dimension  $a_i \times b_i$ , whereas the  $j^{\text{th}}$  well is located at  $(x_j, y_j)$ . Recharge is considered at time-varying rate, whereas the extraction/injection is at a constant rate.  $Q_j$  is the rate of injection/extraction in the  $j^{\text{th}}$  well.  $\delta$  is the Dirac delta function. Thus, define  $P(x, y, t)$

$$P(x, y, t) = \left[ \sum_{i=1}^{p_1} R_i(x, y, t) + \sum_{j=1}^{p_2} \omega_j Q_j \delta(x - x_j) \delta(y - y_j) \right] \quad (2)$$

where  $R_i(x, y, t)$  denotes the transient recharge rate in the  $i^{\text{th}}$  basin extending from  $x_i \leq x \leq x_i + a_i$ ;  $y_i \leq y \leq y_i + b_i$ . Assume that

$$R_i(x, y, t) = \begin{cases} N_{i0} + N_{i1} e^{-\lambda_i t}, & x_i \leq x \leq x_i + a_i; y_i \leq y \leq y_i + b_i \\ 0, & \text{otherwise} \end{cases} \quad (3)$$

where  $\lambda_i$  is a positive constant, determining the rate at which the recharge in the  $i^{\text{th}}$  basin reduces to a final value  $N_{i0}$  from an initial value  $N_{i0} + N_{i1}$ .

The initial and boundary conditions are prescribed as follows:

**For case I**

$$h(x, y, t = 0) = h_0, \left( \frac{\partial h}{\partial y} \right)_{y=0} = 0; \left( \frac{\partial h}{\partial y} \right)_{y=B} = 0, h(x = 0, y, t) = h_0; h(x = A, y, t) = h_0 \quad (4)$$

**For case II**

$$h(x, y, t = 0) = h_0, \left( \frac{\partial h}{\partial x} \right)_{x=0} = 0; \left( \frac{\partial h}{\partial x} \right)_{x=L} = 0, \left( \frac{\partial h}{\partial y} \right)_{y=0} = 0; \left( \frac{\partial h}{\partial y} \right)_{y=B} = 0 \quad (5)$$

Equation (1) is a second-order partial differential equation of parabolic nature, often referred to as a two-dimensional Boussinesq equation. Due to its nonlinearity, Boussinesq equation is analytically intractable. In order to find an approximate analytical solution of (1), we rewrite it in the form

$$K_x \frac{\partial^2 h^2}{\partial x^2} + K_y \frac{\partial^2 h^2}{\partial y^2} + 2P(x, y, t) = S \left( \frac{1}{h} \frac{\partial h^2}{\partial t} \right) + \frac{2k}{b} \frac{(h^2 - h_0^2)}{(h + h_0)} \quad (6)$$

Equation (7) is now linearized by the relation  $\bar{h} = (h_0 + h_t)/2$  where  $h_0$  is the initial water head and  $h_t$  is the water head at the current moment (Marino 1973).

$$\frac{\partial^2 h^2}{\partial x^2} + \frac{K_y}{K_x} \frac{\partial^2 h^2}{\partial y^2} + \frac{2}{K_x} P(x, y, t) = \frac{S}{K_x \bar{h}} \left( \frac{\partial h^2}{\partial t} \right) + \frac{k}{K_x b \bar{h}} (h^2 - h_0^2) \quad (7)$$

Now, define  $H(x, y, t) = h^2 - h_0^2$ , we get

$$\frac{\partial^2 H}{\partial x^2} + \frac{K_y}{K_x} \frac{\partial^2 H}{\partial y^2} + \frac{2}{K_x} P(x, y, t) = \frac{S}{K_x \bar{h}} \frac{\partial H}{\partial t} + \frac{k}{K_x b \bar{h}} H \quad (8)$$

The initial and boundary conditions read as

**For case I**

$$H(x, y, 0) = 0, \left( \frac{\partial H}{\partial y} \right)_{y=0} = 0; \left( \frac{\partial H}{\partial y} \right)_{y=B} = 0, H(x = 0, y, t) = 0; H(x = A, y, t) = 0 \quad (9)$$

**For Case II**

$$H(x, y, 0) = 0, \left( \frac{\partial H}{\partial x} \right)_{x=0} = 0; \left( \frac{\partial H}{\partial x} \right)_{x=L} = 0, \left( \frac{\partial H}{\partial y} \right)_{y=0} = 0; \left( \frac{\partial H}{\partial y} \right)_{y=B} = 0 \quad (10)$$

Equation (8) along with the conditions (9) and (10) is solved using Fourier transform.

Thus, the solution of equation (8) is obtained as

**For case I**

$$h^2 = h_0^2 + \frac{8\nu}{ABK_x} \sum_{m=1}^{\infty} \sum_{n=1}^{\infty} \sin(\beta_m x) \cos(\gamma_n y) \left[ \sum_{j=1}^{p_2} \frac{\omega_j \eta_j Q_j}{\alpha + \nu c} (1 - e^{-(\alpha + \nu c)t}) \right. \\ \left. + \sum_{i=1}^{p_1} \Omega_i \left\{ \frac{N_{i0}}{\alpha + \nu c} (1 - e^{-(\alpha + \nu c)t}) + \frac{N_{i1}}{\alpha + \nu c - \lambda_i} (e^{-\lambda_i t} - e^{-(\alpha + \nu c)t}) \right\} \right] \quad (11)$$

**For case II**

$$h^2 = h_0^2 + \frac{8\nu}{ABK_x} \sum_{m=1}^{\infty} \sum_{n=1}^{\infty} \cos(\beta_m x) \cos\left(\gamma_n \sqrt{\frac{Kx}{Ky}} y\right) \left[ \sum_{j=1}^{p_2} \frac{\omega_j \eta_j Q_j}{\alpha + \nu c} (1 - e^{-(\alpha + \nu c)t}) \right. \\ \left. + \sum_{i=1}^{p_1} \Omega_i \left\{ \frac{N_{i0}}{\alpha + \nu c} (1 - e^{-(\alpha + \nu c)t}) + \frac{N_{i1}}{\alpha + \nu c - \lambda_i} (e^{-\lambda_i t} - e^{-(\alpha + \nu c)t}) \right\} \right] \quad (12)$$

## DISCUSSION OF RESULTS


The model domain is considered to have two rectangular basins, namely  $B_1$  and  $B_2$ , each of dimension 10 m x 10 m, and centered at (35m, 35m) and (115m, 35m) respectively. Moreover, two extraction wells, namely  $W_1$  and  $W_2$ , located at (35m, 75m) and (115m, 75m) are considered. Recharge is applied through  $B_1$  and  $B_2$  at a time-varying rate  $0.5 + 0.8 e^{-0.2t}$  and  $0.4 + 0.9 e^{-0.2t}$  per day respectively. At the same time, water is extracted from  $W_1$  and  $W_2$  at a constant rate 40 and 30 m<sup>3</sup>/day respectively. Average saturated depth of the aquifer is determined using an iterative relation  $\bar{h} = (h_0 + h_t)/2$  where  $h_0$  is the initial water head and  $h_t$  is the water head at the current moment (Marino 1973). Initial approximation of  $\bar{h}$  is taken as  $h_0$ . Transient profiles of the water table fluctuations are determined for various values of time  $t$ .

Distribution of water head along line  $y = 35$  m (line passing through the centers of recharge basins  $B_1$  and  $B_2$ ) for  $t = 1, 5$  and 10 d is presented in Figure 1 and Figure 3.


It is observed that the groundwater mounds are symmetrical about the centers of the basins; however, the growth of mound beneath  $B_1$  is marginally higher than that of beneath  $B_2$ , mainly due to varying recharge rate used in this example.

Hydraulic resistance of aquifer's base (measured by the ratio  $b/k$ ) has significant impact on the transient profiles of the phreatic surface. Numerical experiments reveal that the groundwater mound attains a higher level in those aquifers which have comparatively higher values of hydraulic resistance. This is primarily due to vertical seepage loss through the aquifer's base, which decreases as the hydraulic resistance increases.



**Figure 1** Groundwater mound for  $k = 0.25$  m/d

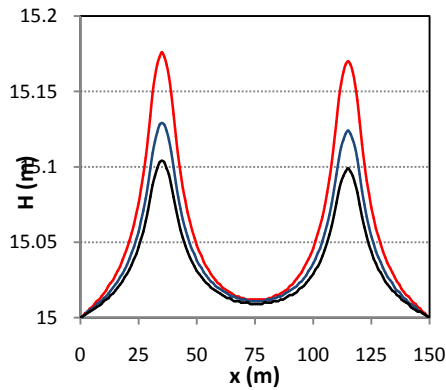

**Figure.2** Cone of depression for  $k = 0.25$  m/d

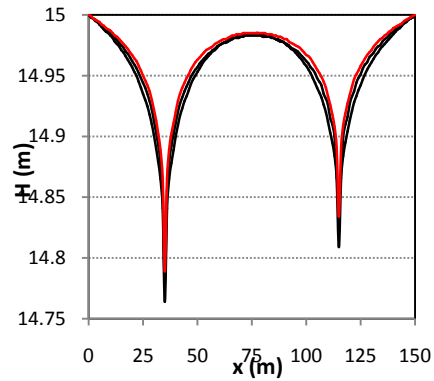



**Figure 3:**Ground water mound for  $t=1$  and 5 day **Figure 4:**cone of depression for  $t=1$  and 5 days

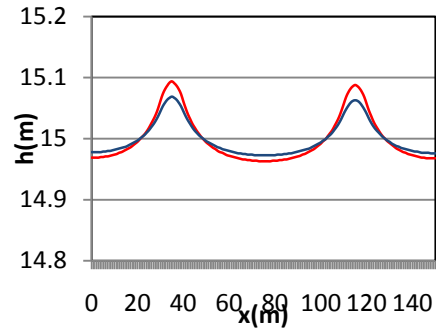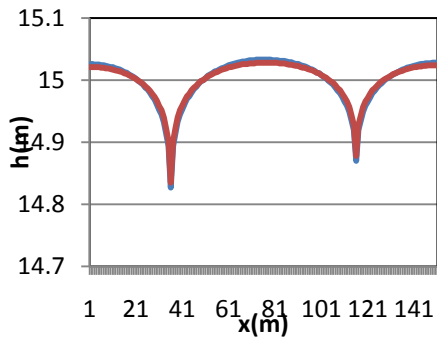


Lowering of water table due to continuous pumping from wells  $W_1$  and  $W_2$  are shown in Figure2 and Figure 4. These profiles characterize cones of depression at  $t = 1, 5$  and  $10$  d in the presence of semi-pervious base with  $k = 0.25$  m/d.

The difference in depth of cone under  $W_1$  and  $W_2$  is primarily due to varying pumping rate ( $Q_1 = 40$  m<sup>3</sup>/d,  $Q_2 = 30$  m<sup>3</sup>/d). It can be observed from these figures that the depth of cone increases with time. Moreover, water table depletion induced by pumping from wells is also affected by the hydraulic resistance of the aquifer's base. When the base is leaky, withdrawal from the wells is supplemented by the leakage induced vertical flow from hydraulically connected sources. Consequently, the depth of the cone of depression is mitigated. Three dimensional view of the groundwater mound and the cone of depression for  $t = 10$  days is shown in Figure 5 (A and B) for  $k = 0.25$  m/d and  $k = 0$  in case I similarly in Figure 6(A and B) for case II.

**Figure. 5 (A and B)** Water table profile for  $k = 0.25$  m/d and  $k = 0$  in case I

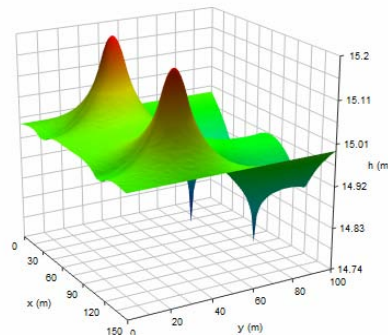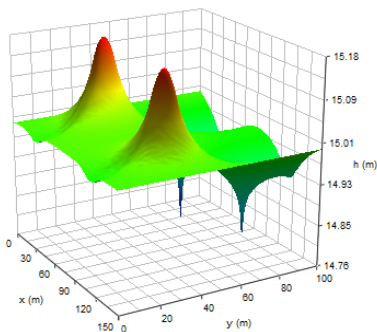

**Fig. 6 (A and B)** Water table profile for  $k = 0.25$  m/d and  $k = 0$  in case II

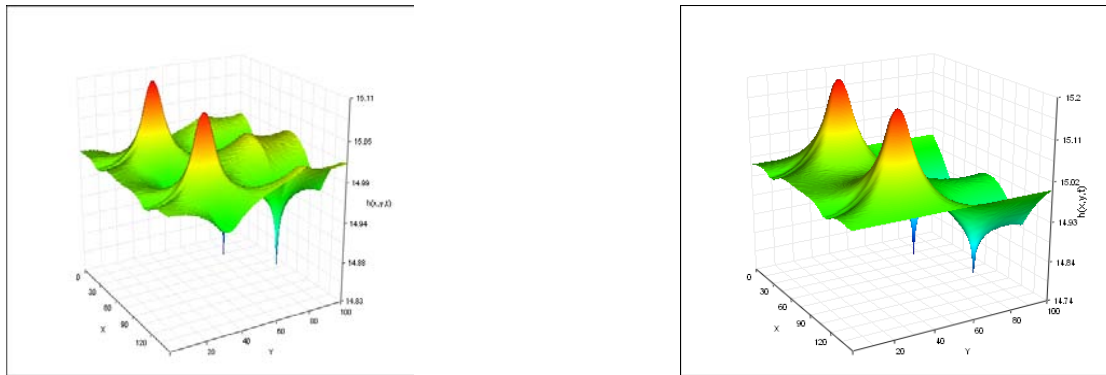

## CONCLUSION:

In this paper, approximate analytical solution of 2-dimensional Boussinesq equation is developed to simulate water table fluctuations in a rectangular shaped unconfined aquifer due to multiple recharge and withdrawal is studied. The mathematical model consists of an anisotropic and homogeneous aquifer system overlying a leaky base, and hydraulically connected with two water bodies along its opposite faces. Two sides impervious and all four side impervious boundaries are considered. Analytical expressions for water head distribution are developed using finite Fourier transform. The conclusions obtained in this study are as follows:

- The solution developed in this study has the ability to predict the fluctuations in water table in unconfined aquifer due to multiple recharge and withdrawal.
- The numerical examples demonstrated that the semi-pervious layer supplements the draw-down beneath the wells, and reduces the height of groundwater mound beneath recharge basins.
- The cone of depression forms under the wells. Effect of water pumping from wells is clearly observed.
- The water mound form under recharge basin is broader in the case II that of the case I.
- Effect of semi-pervious base is clearly seen in the water mound and cone of depression.

## References

- [1] Bansal R K (2012), Groundwater fluctuations in sloping aquifers induced by time-varying replenishment and seepage from a uniformly rising stream. *Transport Porous Med* 92(2): 817-836
- [2] Bansal R K (2013), Groundwater flow in sloping aquifer under localized transient recharge: Analytical study. *J 2, Hydraul Eng* 139(11): 1165-1174
- [3] Bansal R K (2015), Unsteady seepage flow over sloping beds in response to multiple localized recharge. *Appl Water Sci* DOI 10.1007/s13201-015-0290-2

- [4] Bansal R K, Teloglou IS (2013), An analytical study of groundwater fluctuations in unconfined leaky aquifers induced by multiple localized recharge and withdrawal. *Global Nest* 15(3): 394-407
- [5] Bansal R K, Chhaya lande, Arudhati warke (2016), Unsteady Groundwater Flow over Sloping Beds: Analytical Quantification of Stream–Aquifer Interaction in Presence of Thin Vertical Clogging Layer, *Journal of hydrologic engineering, ASCE*, 21(7), 04016017-1 to 15.
- [6] Beven K (1981), Kinematic subsurface stormflow. *Water Resour Res* 17(5): 1419–1421
- [7] Brutsaert W (1994). The unit response of groundwater outflow from a hillslope. *Water Resour Res*, 30(10): 2759–2763
- [8] Lande C, Bansal R.K., Warke A (2016), Simulation of 2-dimensional subsurface seepage flow in an anisotropic porous medium, Elsevier, *Perspective in science*, 8, 276-278.
- [9] Finnemore EJ (1995) A program to calculate groundwater mound heights. *Groundwater* 33: 139–143.
- [10] Hantush MS (1965) Wells near streams with semi-pervious beds. *J Geophys Res* 70(12): 2829–2838
- [11] Hantush MS (1967) Growth and decay of groundwater mounds in response to uniform percolation. *Water Resour Res* 3: 227–234.
- [12] Hunt BW (1971) Vertical recharge of unconfined aquifer. *J HydraulDev* 97(7): 1017–1030.
- [13] Hunt B (1999) Unsteady stream depletion from ground water pumping. *Ground Water* 37: 98–102
- [14] Latinopoulos P (1984) Periodic recharge to finite aquifer for rectangular areas. *Adv Water Resour* 7(3): 137–140
- [15] Latinopoulos P (1986) A boundary element approach for modeling groundwater movement. *Adv Water Resour* 9:171–177
- [16] Lockington DA (1997) Response of unconfined aquifer to sudden change in boundary head. *J Irrig Drain Eng* 123(1): 24–27
- [17] Manglik A, Rai SN, Singh RN (1997) Response of an unconfined aquifer induced by time varying recharge from a rectangular basin. *Water Resource Manage* 11:185-196
- [18] Marino M (1973) Water-table fluctuation in semipervious stream–unconfined aquifer systems. *J Hydrol* 19: 43–52
- [19] Moench AF, Barlow PM (2000) Aquifer response to stream-stage and recharge variations. I. Analytical response functions. *J Hydrol* 230: 192–210
- [20] Polubarinova-Kochina PY (1962) *Theory of Groundwater Movement* (trans: deWiest, J.M.R.) Princeton University Press, Princeton
- [21] Rai S N, Manglik A (1999) Modelling of water table variation in response to time-varying recharge from multiple basins using the linearised Boussinesq equation. *J Hydrol* 220(3–4): 141–148
- [22] Rai S N, Manglik A (2012) An analytical solution of Boussinesq equation to predict water table fluctuations due to time varying recharge and withdrawal from multiple basins, wells and leakage sites. *Water Resour Manage* 26:243–252
- [23] Sneddon IN (1974) *The Use of Integral Transform*. Tata McGraw-Hill, New Delhi
- [24] Teloglou IS, Bansal R K (2012), Transient solution for stream–unconfined aquifer interaction due to time varying stream head and in the presence of leakage, *Journal of Hydrology*, 428, 68-79.
- [25] Troch P, Loon E.van, Hilberts A (2002) Analytical solutions to a hillslope-storage kinematic wave equation for subsurface flow. *Adv Water Resour* 25(6): 637–649
- [26] Upadhyaya A, Chauhan HS (2001) Interaction of stream and sloping aquifer receiving constant recharge. *J Irrig Drain Eng* 127(5): 295–301
- [27] Verhoest NEC, Troch PA (2000) Some analytical solution of the linearized Boussinesq equation with recharge for sloping aquifer. *Water Resour Res* 36(3): 793–800
- [28] Verhoest NEC, Pauwels VRN, Troch PA, Troch FPD (2002) Analytical solution for transient water table heights and outflow from ditch-drained terrains. *J Irrig Drain Eng* 128(6):358–364
- [29] Zomorodi K (1991) Evaluation of the response of a water table to a variable recharge. *HydroSci J* 36(1): 67–78
- [30] Zlotnik VA, Tartakovsky DM (2008) Stream depletion by groundwater pumping in leaky aquifers. *J HydrolEng* 13(2): 146-155
- [31] Zlotnik VA., A Kacimov (2017) Estimating groundwater mounding in sloping aquifers for Managed Aquifer Recharge, National Groundwater Association.